

TS – Bar & Plate
Oil / Air Cooler, 1T - Line

Foot mounting for asa rail system

Mounting feet are available in three variants. For mobile machines, vehicles and other applications with high corrosion and mechanical loads, we recommend the heavy-duty version. Each set includes two mounting feet and the fastening material.

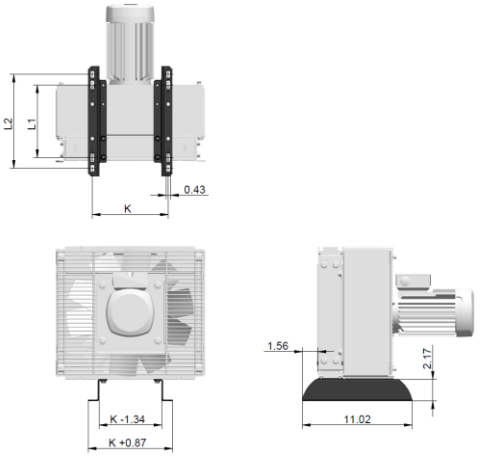

Connection example



Dimensions

order number	description	A	B	C	L1	L2	weight
		[in]	[in]	[in]	[in]	[in]	[lbs]
ILLEFUSSTTKU00	mounting feet set 1T 007 – 027	11.02	1.57	2.17	6.89 - 7.88	9.06 - 9.85	2.7
ILLEFUSSTTHDKU00	mounting feet set 1T 007 – 038 (heavy duty)	11.02	1.57	2.17	6.89 - 7.88	9.06 - 9.85	3.7
ILLEFUSSTTLKU00	mounting feet 1T long version	21.26	1.98	2.24	16.14 - 16.69	19.29 - 20.08	6.0







Dimensions

cooler	ILLEFUSSTTKU00 standard mounting set		ILLEFUSSTTHDKU00 heavy duty mounting set		ILLEFUSSTTLKU00 long version mounting set	
	K_{min}	K_{max}	K_{min}	K_{max}	K_{min}	K_{max}
	[in]	[in]	[in]	[in]	[in]	[in]
1T 007	3.94	5,31	5.31	5.71	-	-
1T 010	3.94	8.46	5.31	8.66	-	-
1T 013	3.94	8.46	5.31	8.66	-	-
1T 017	3.94	11.42	5.31	11.81	-	-
1T 023	3.94	11.42	5.31	11.81	5.31	11.42
1T 027	3.94	14.96	5.31	15.55	5.31	15.16
1T 028	-	-	-	-	-	-
1T 037	-	-	-	-	-	-
1T 038	-	-	5.31	22.05	5.31	21.65

Characteristics

bracket material	steel

Corrosion Protection

ILLEFUSSTTKU00 ILLEFUSSTTLKU00	comparable to C3 short (ISO 12944), Ri3 (ISO 4628-3)
ILLEFUSSTTHDKU00	comparable to C5-M short (ISO 12944), Ri3 (ISO 4628-3)

Options

silent absorber	MDGQ.....

Delivery Content

foot mounting bracket	2x
mounting material	included

This data sheet and the corresponding technical drawings serve solely as a general guideline and a technical overview of our products. Please contact us for additional information. We always try to keep the technical data up to date. However, due to constant development, no guarantee can be given for the correctness of the information (or printing errors). This applies to general properties such as dimensions, colors and weight. Any cooling performances and general technical values indicated in this catalogue are measured at a test benches according to asa testing procedures or calculated based on such tests and may therefore deviate from values obtained by test procedures from other manufacturers. The performance can vary by around +/- 15%. All information and calculation values are provided to the best of our knowledge, they do not represent intrinsic product properties and it is strongly recommended that the product is tested under the actual operating conditions. All drawings shown here are to be understood as schematic representations. For exact dimensions and the applicable tolerances, please ask for the corresponding scale drawings. Any form of liability is excluded for the information included in this datasheet. asa GmbH reserves the right to modify the product without any separate notification. This refers to both technical data and the product itself. Furthermore, it is herewith specified that the datasheet and the corresponding scale drawings are not a substitute for the assembly, installation and operating instructions.

© asa technology, November 2026