
TS – Bar & Plate
Oil / Air Cooler, 1T -Line

Protection Housing

The protection housing is a flexible, cost-effective and easy-to-install solution for a wide range of mounting situations. Shock absorbers between the housing and the cooler reduce mechanical stress, particularly in mobile applications. The radiator side is protected by a robust grille.

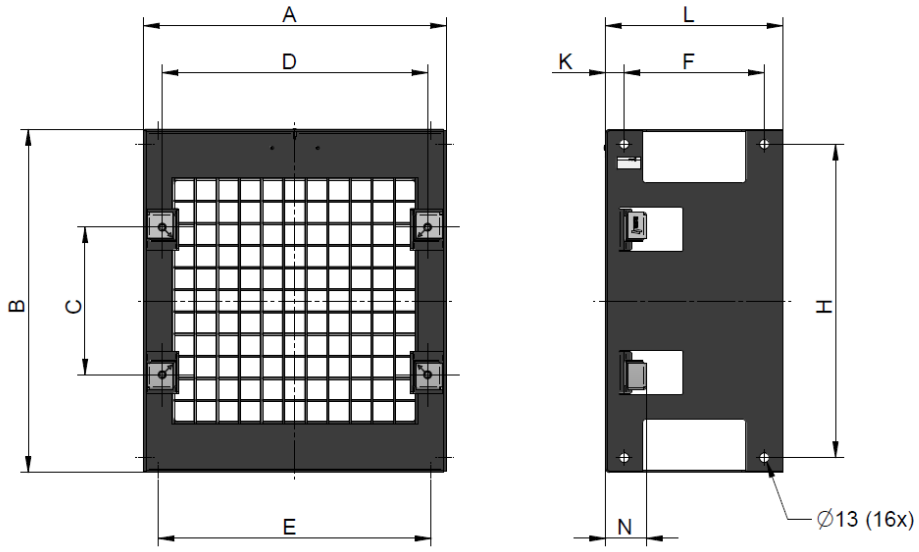

Dimensions

order number	description	A	B	C	D	E	F	H	L	K	N	weight
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
ILLEGAKTT07GTU00	protection housing kit 1T 007 rail	13.15	16.73	6.77	11.42	11.81	7.48	15.16	9.45	0.79	1.30	5,2
ILLEGAKTT11GTU00	protection housing kit 1T 010 rail	16.14	18.31	7.87	14.17	14.57	7.48	16.73	9.45	0.98	2.17	9,0
ILLEGAKTT16GTU00	protection housing kit 1T 017 rail	19.29	23.23	12.05	17.17	17.72	8.27	21.65	10.24	0.98	2.17	13,4

Overview

order number	description	ASA 1T									
		004	007	010	013	017	023	027	028	037	038
ILLEGAKTT07GTU00	protection housing kit 1T 007 rail	-	●	-	-	-	-	-	-	-	-
ILLEGAKTT11GTU00	protection housing kit 1T 010 rail	-	-	●	-	-	-	-	-	-	-
ILLEGAKTT16GTU00	protection housing kit 1T 017 rail	-	-	-	-	●	-	-	-	-	-

-... not available ●... optional available

Characteristics

bracket material	steel

Corrosion Protection

	comparable to C5-M short (ISO 12944), Ri3 (ISO 4628-3)

Delivery Content

protection housing (1x) ,vibration absorber (4x MDGQ403008IIU00)



This data sheet and the corresponding technical drawings serve solely as a general guideline and a technical overview of our products. Please contact us for additional information. We always try to keep the technical data up to date. However, due to constant development, no guarantee can be given for the correctness of the information (or printing errors). This applies to general properties such as dimensions, colors and weight. Any cooling performances and general technical values indicated in this catalogue are measured at a test benches according to asa testing procedures or calculated based on such tests and may therefore deviate from values obtained by test procedures from other manufacturers. The performance can vary by around +/- 15%. All information and calculation values are provided to the best of our knowledge, they do not represent intrinsic product properties and it is strongly recommended that the product is tested under the actual operating conditions. All drawings shown here are to be understood as schematic representations. For exact dimensions and the applicable tolerances, please ask for the corresponding scale drawings. Any form of liability is excluded for the information included in this datasheet. asa GmbH reserves the right to modify the product without any separate notification. This refers to both technical data and the product itself. Furthermore, it is herewith specified that the datasheet and the corresponding scale drawings are not a substitute for the assembly, installation and operating instructions.

© asa technology, November 2026